Installation manual for C1 CAN bus CPT-interface

Contents list

•C1 interface, picture 1	1pcs
•USB cable, picture 2,	1pcs
•Depth transducer with cable, picture 3	1pcs
•Extraction Cable CAN bus, picture 4	1pcs
•Microphone, picture 5	1pcs
•BNC Cable, picture 6	1pcs
•Power Cable, picture 7	1pcs
•Communication cable, picture 8	1pcs

Attentsion

Connect all cables and Power up the C1 interface before starting up the software program on the computer

Picture 1

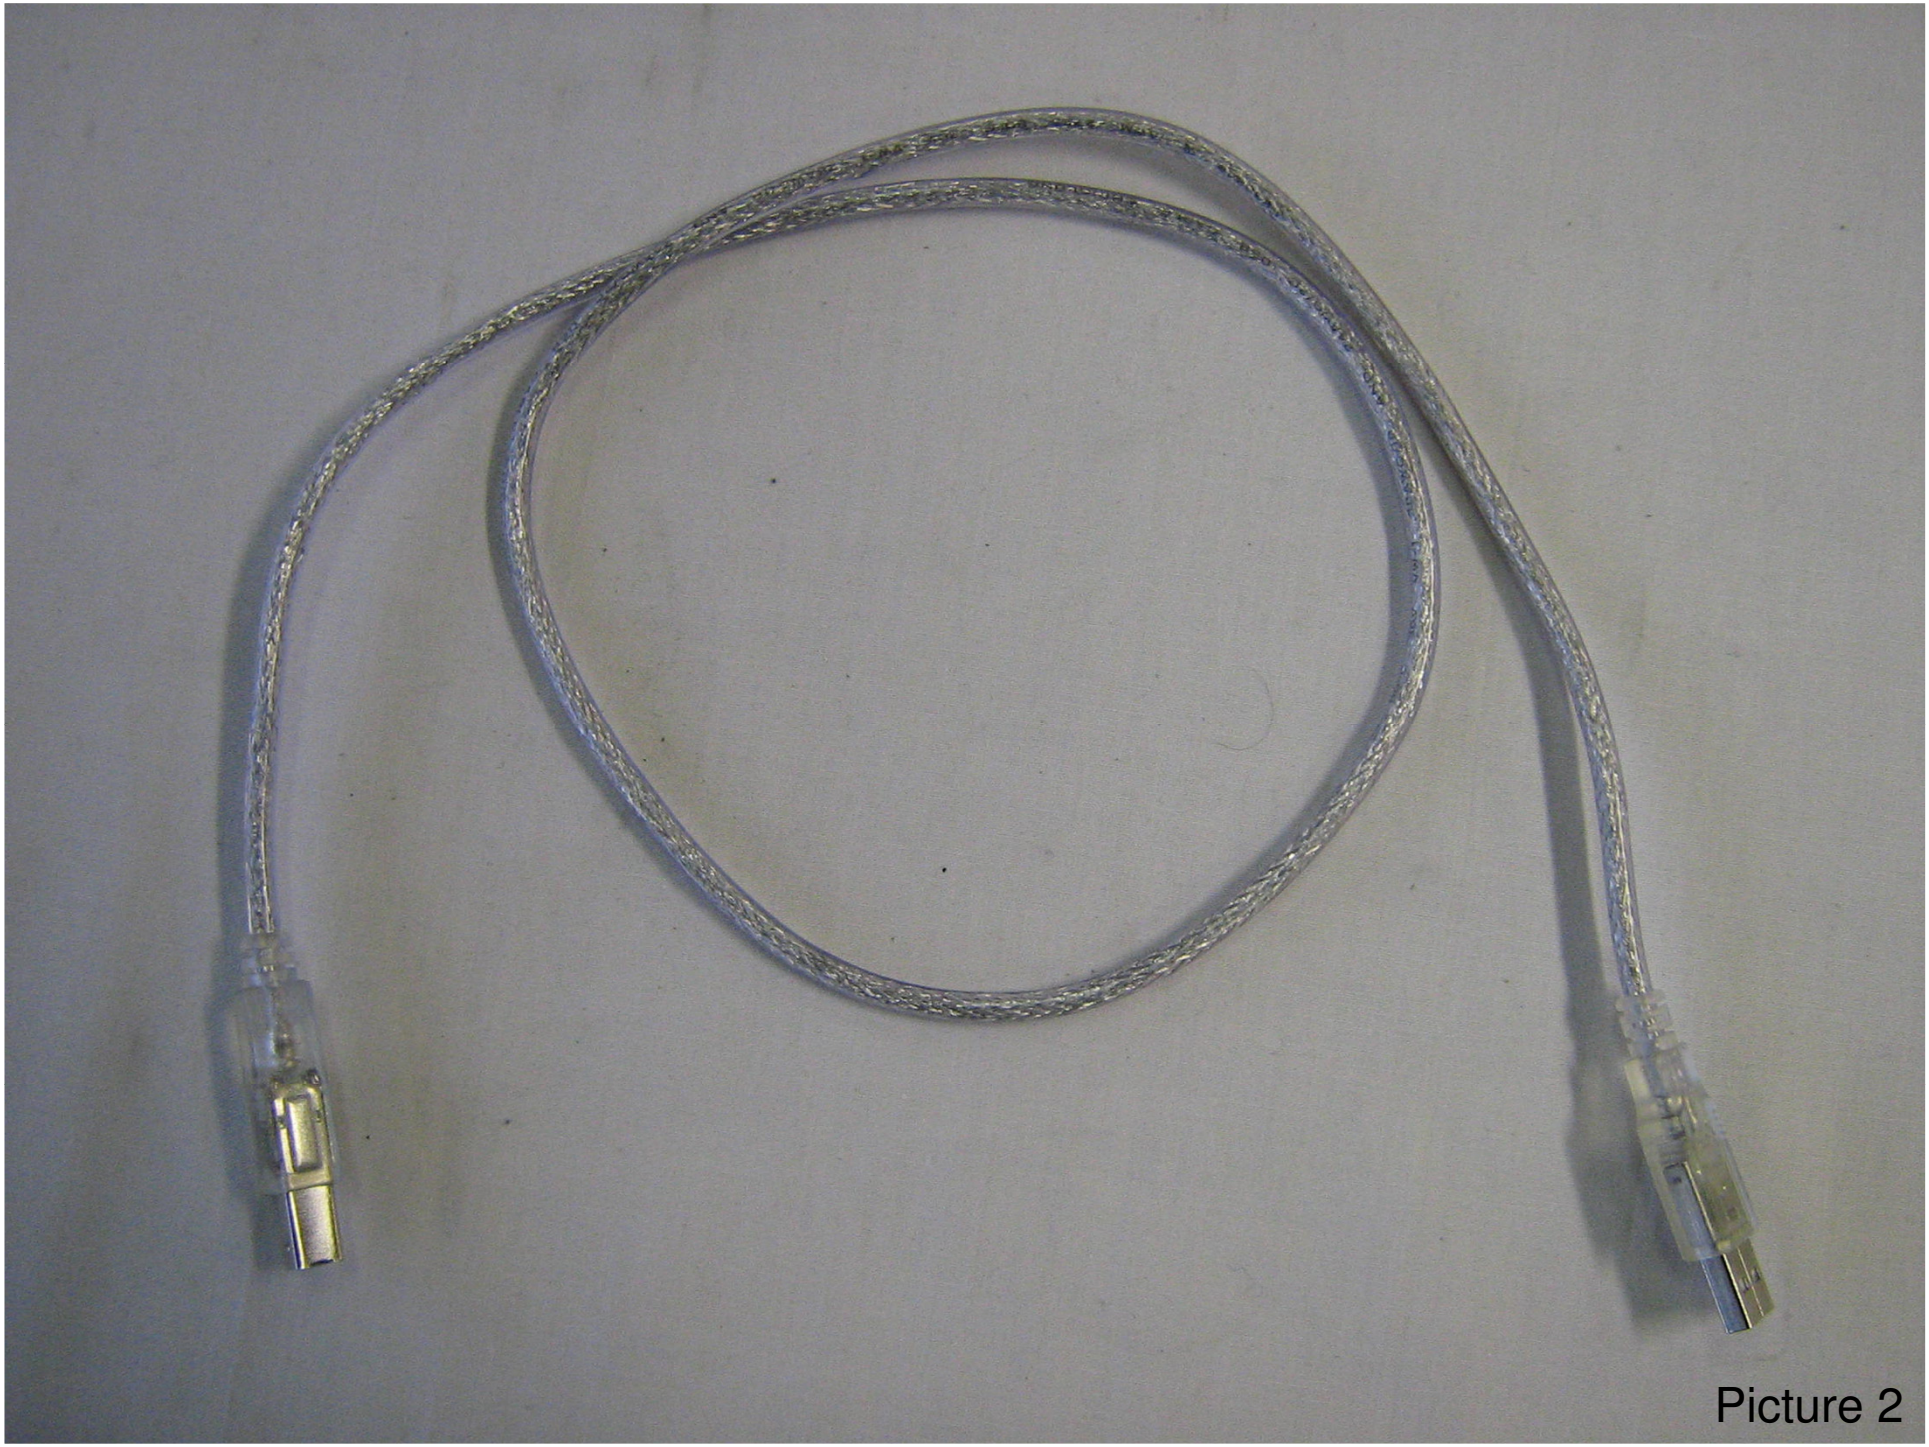

Picture 2

Depth transducer
Picture 3

CAN bus cable for the Depth transducer
Picture 4

Picture 5

Picture 6

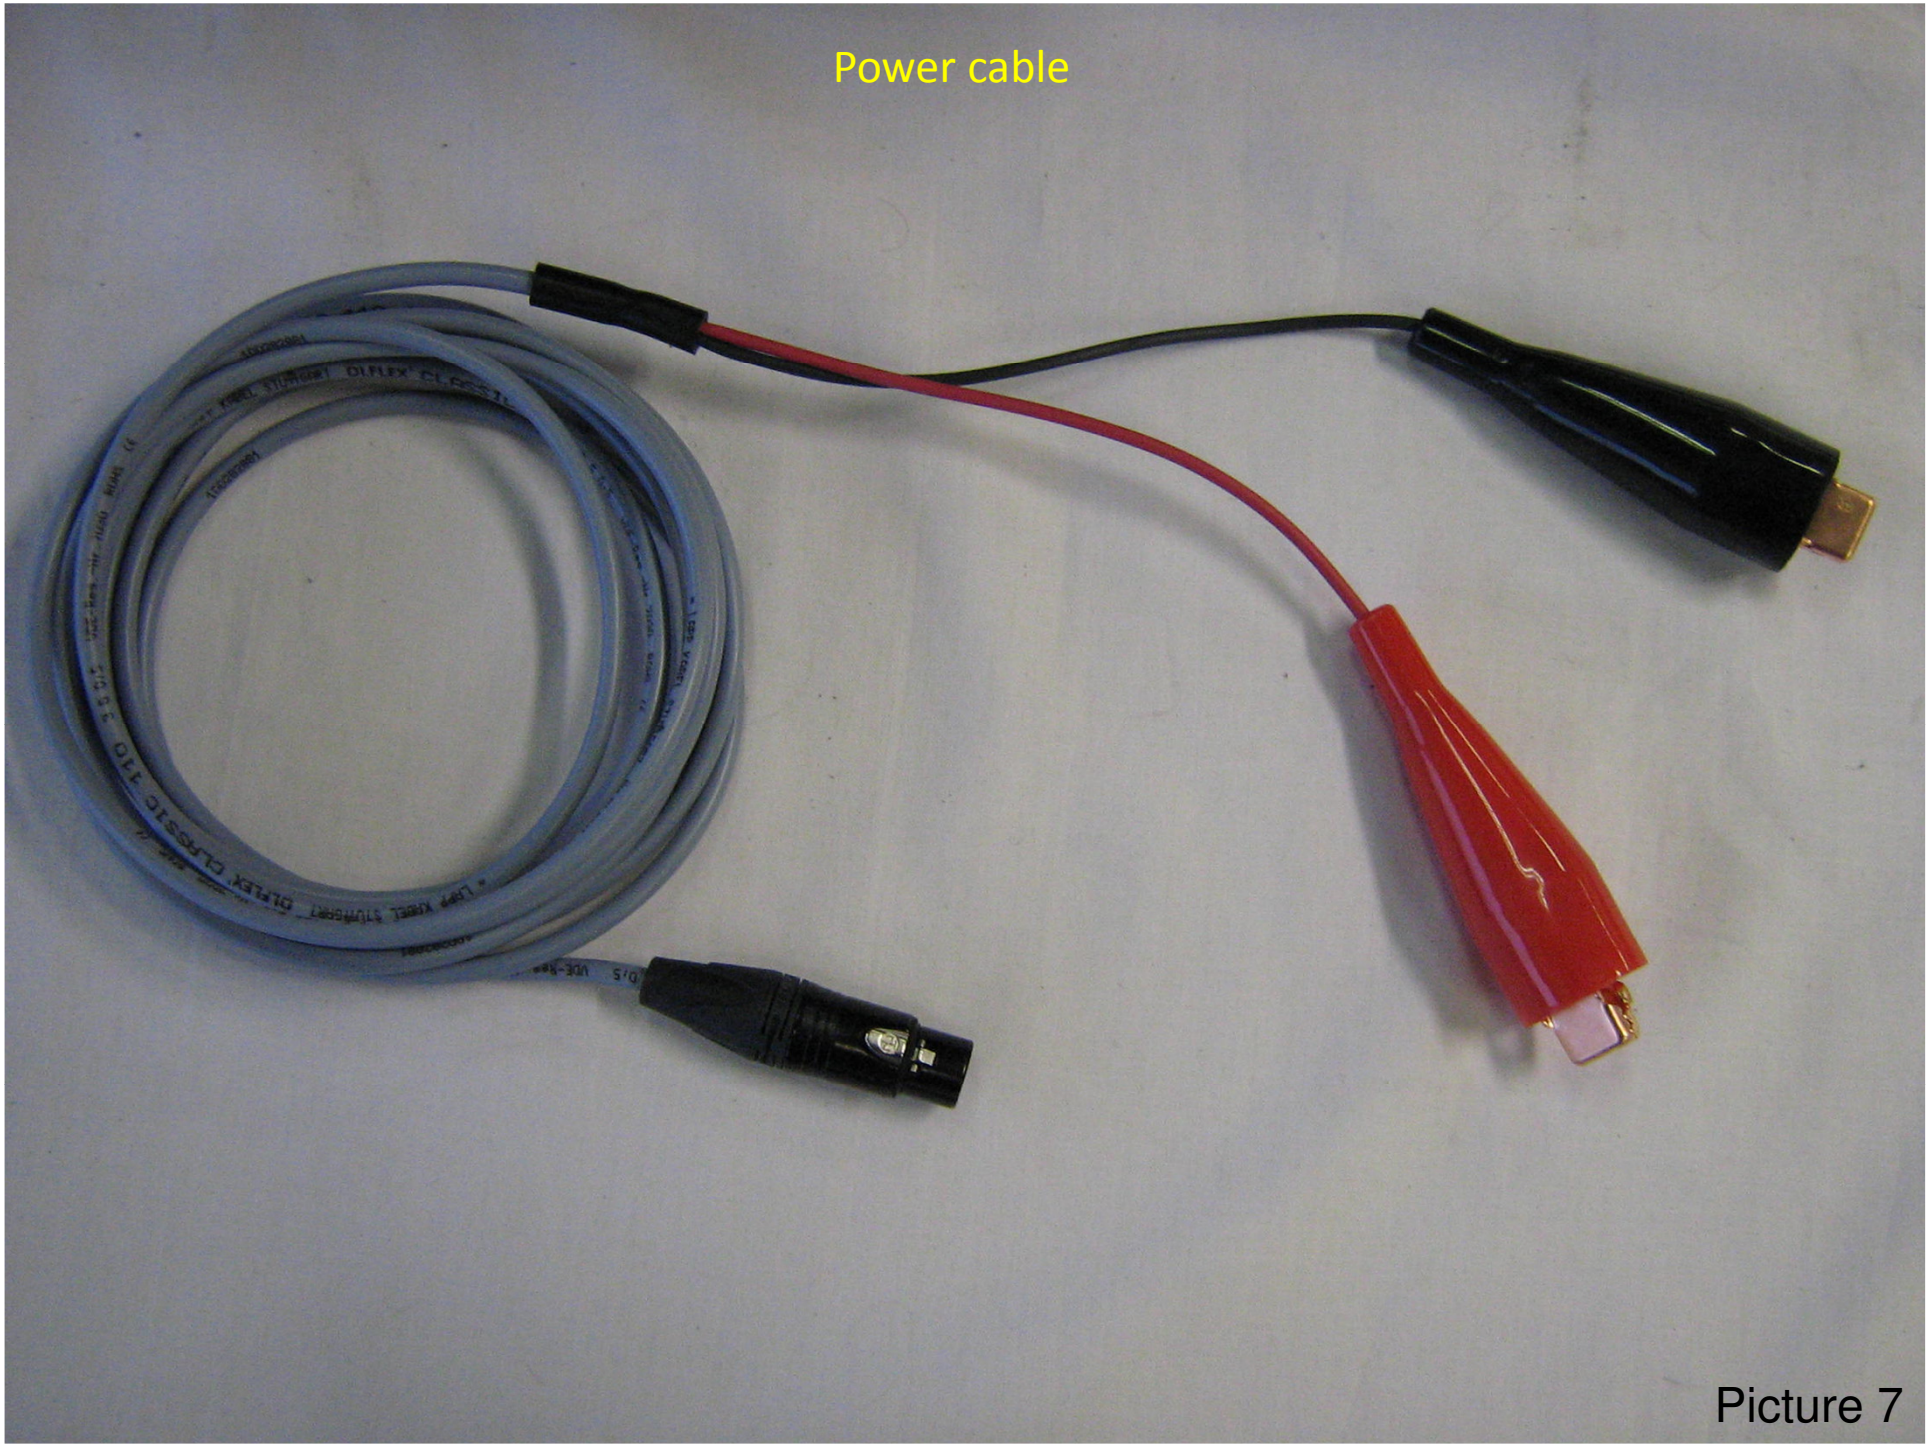

Picture 7

Picture 8

Picture 9

Picture 10

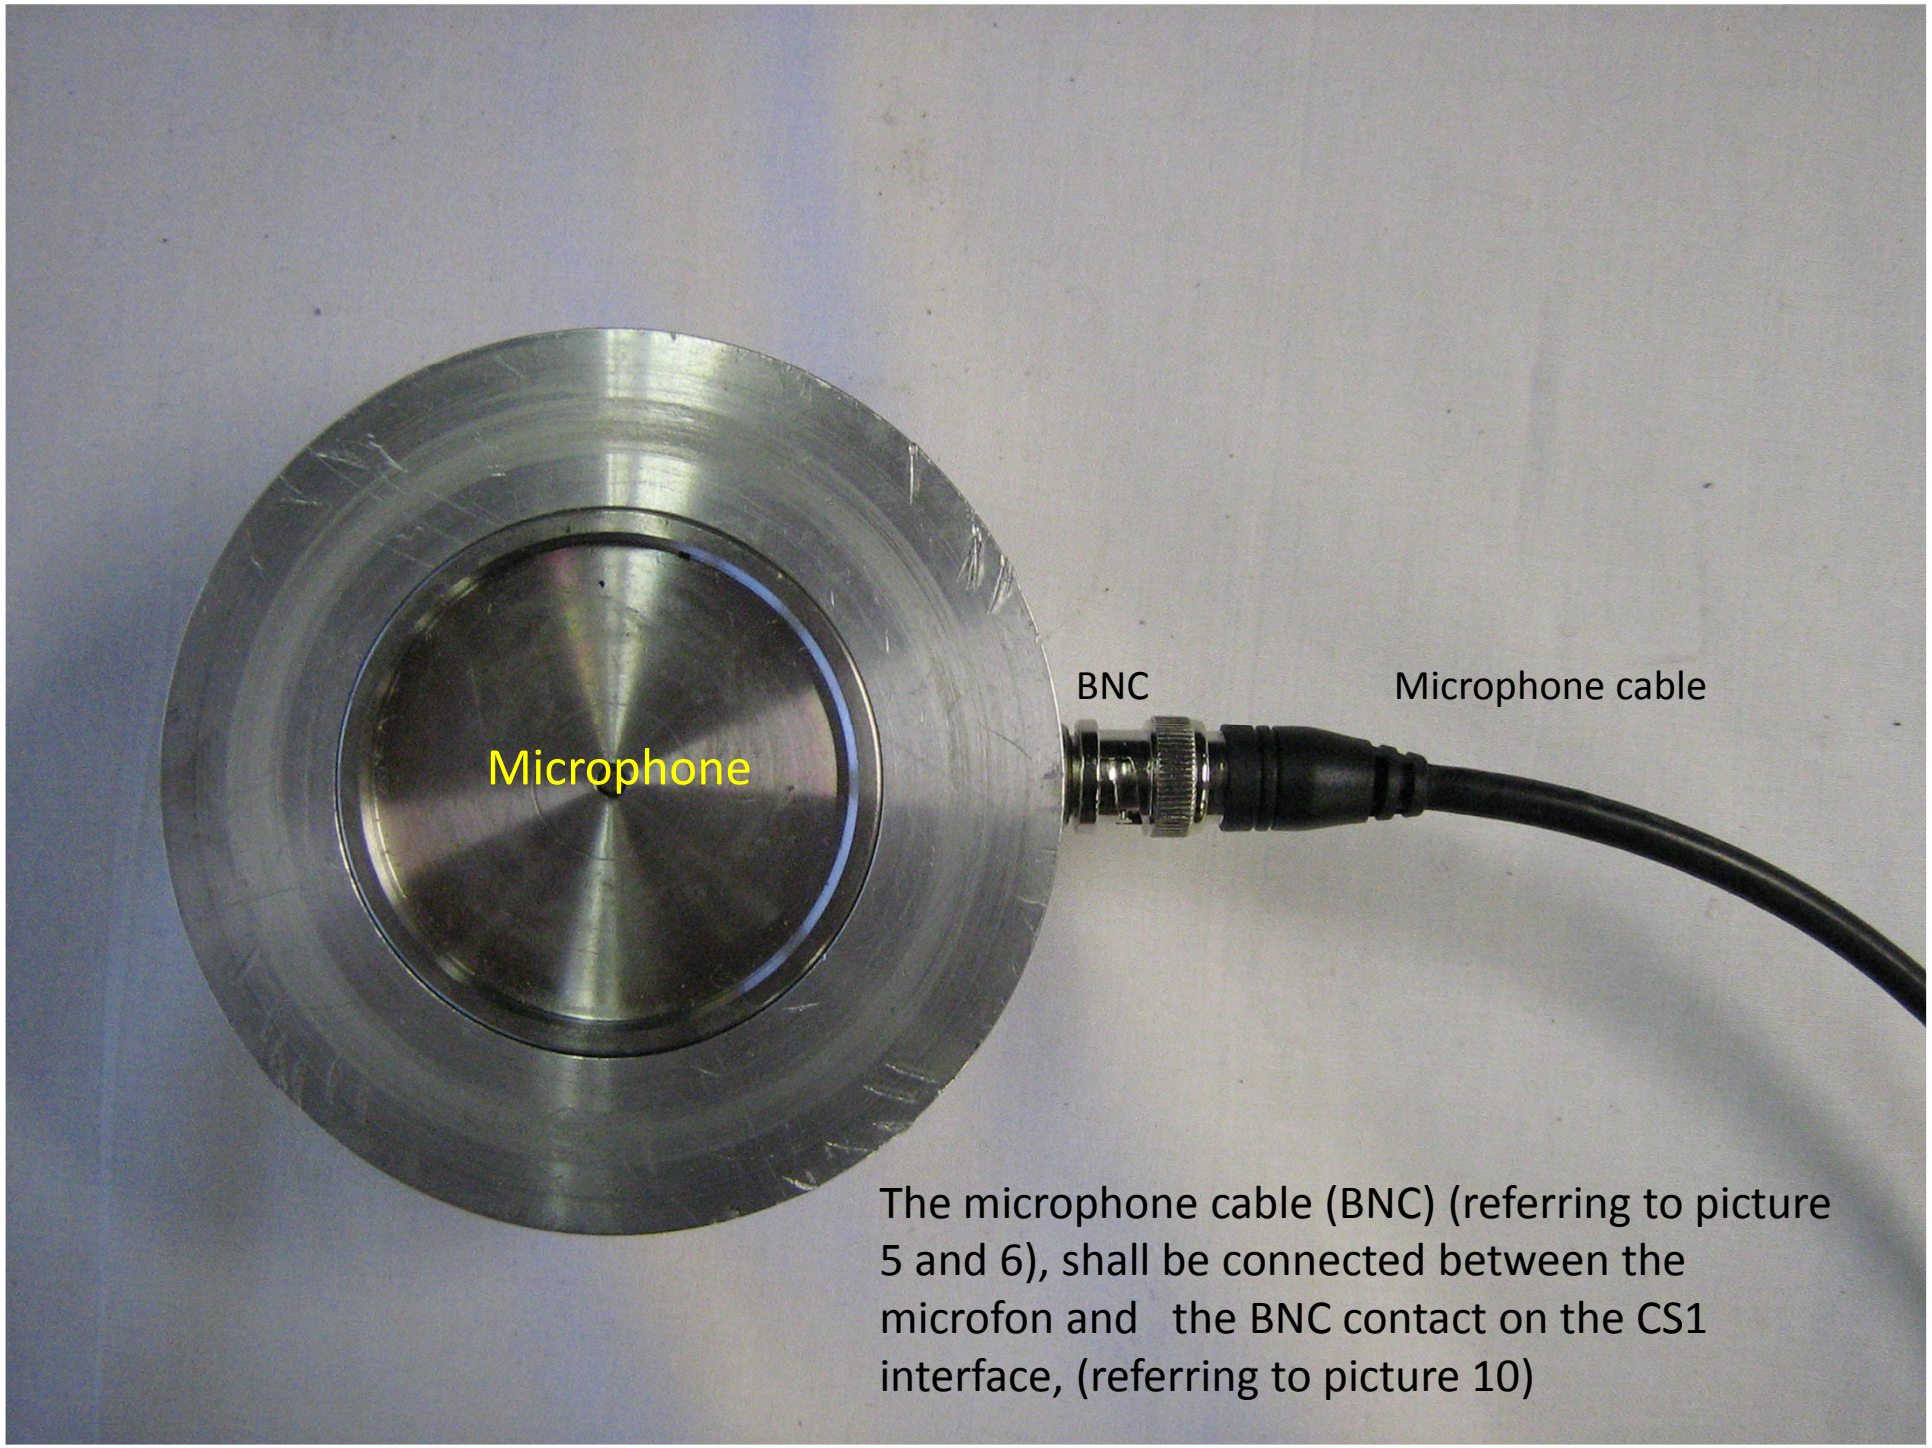

The microphone cable (BNC) (referring to picture 5 and 6), shall be connected between the microfon and the BNC contact on the CS1 interface, (referring to picture 10)

The Communication cable, (referring picture 8) for the CPTu probe is connected from the probe to the ”Probe in” socket, (referring to picture 9) on the C1 interface

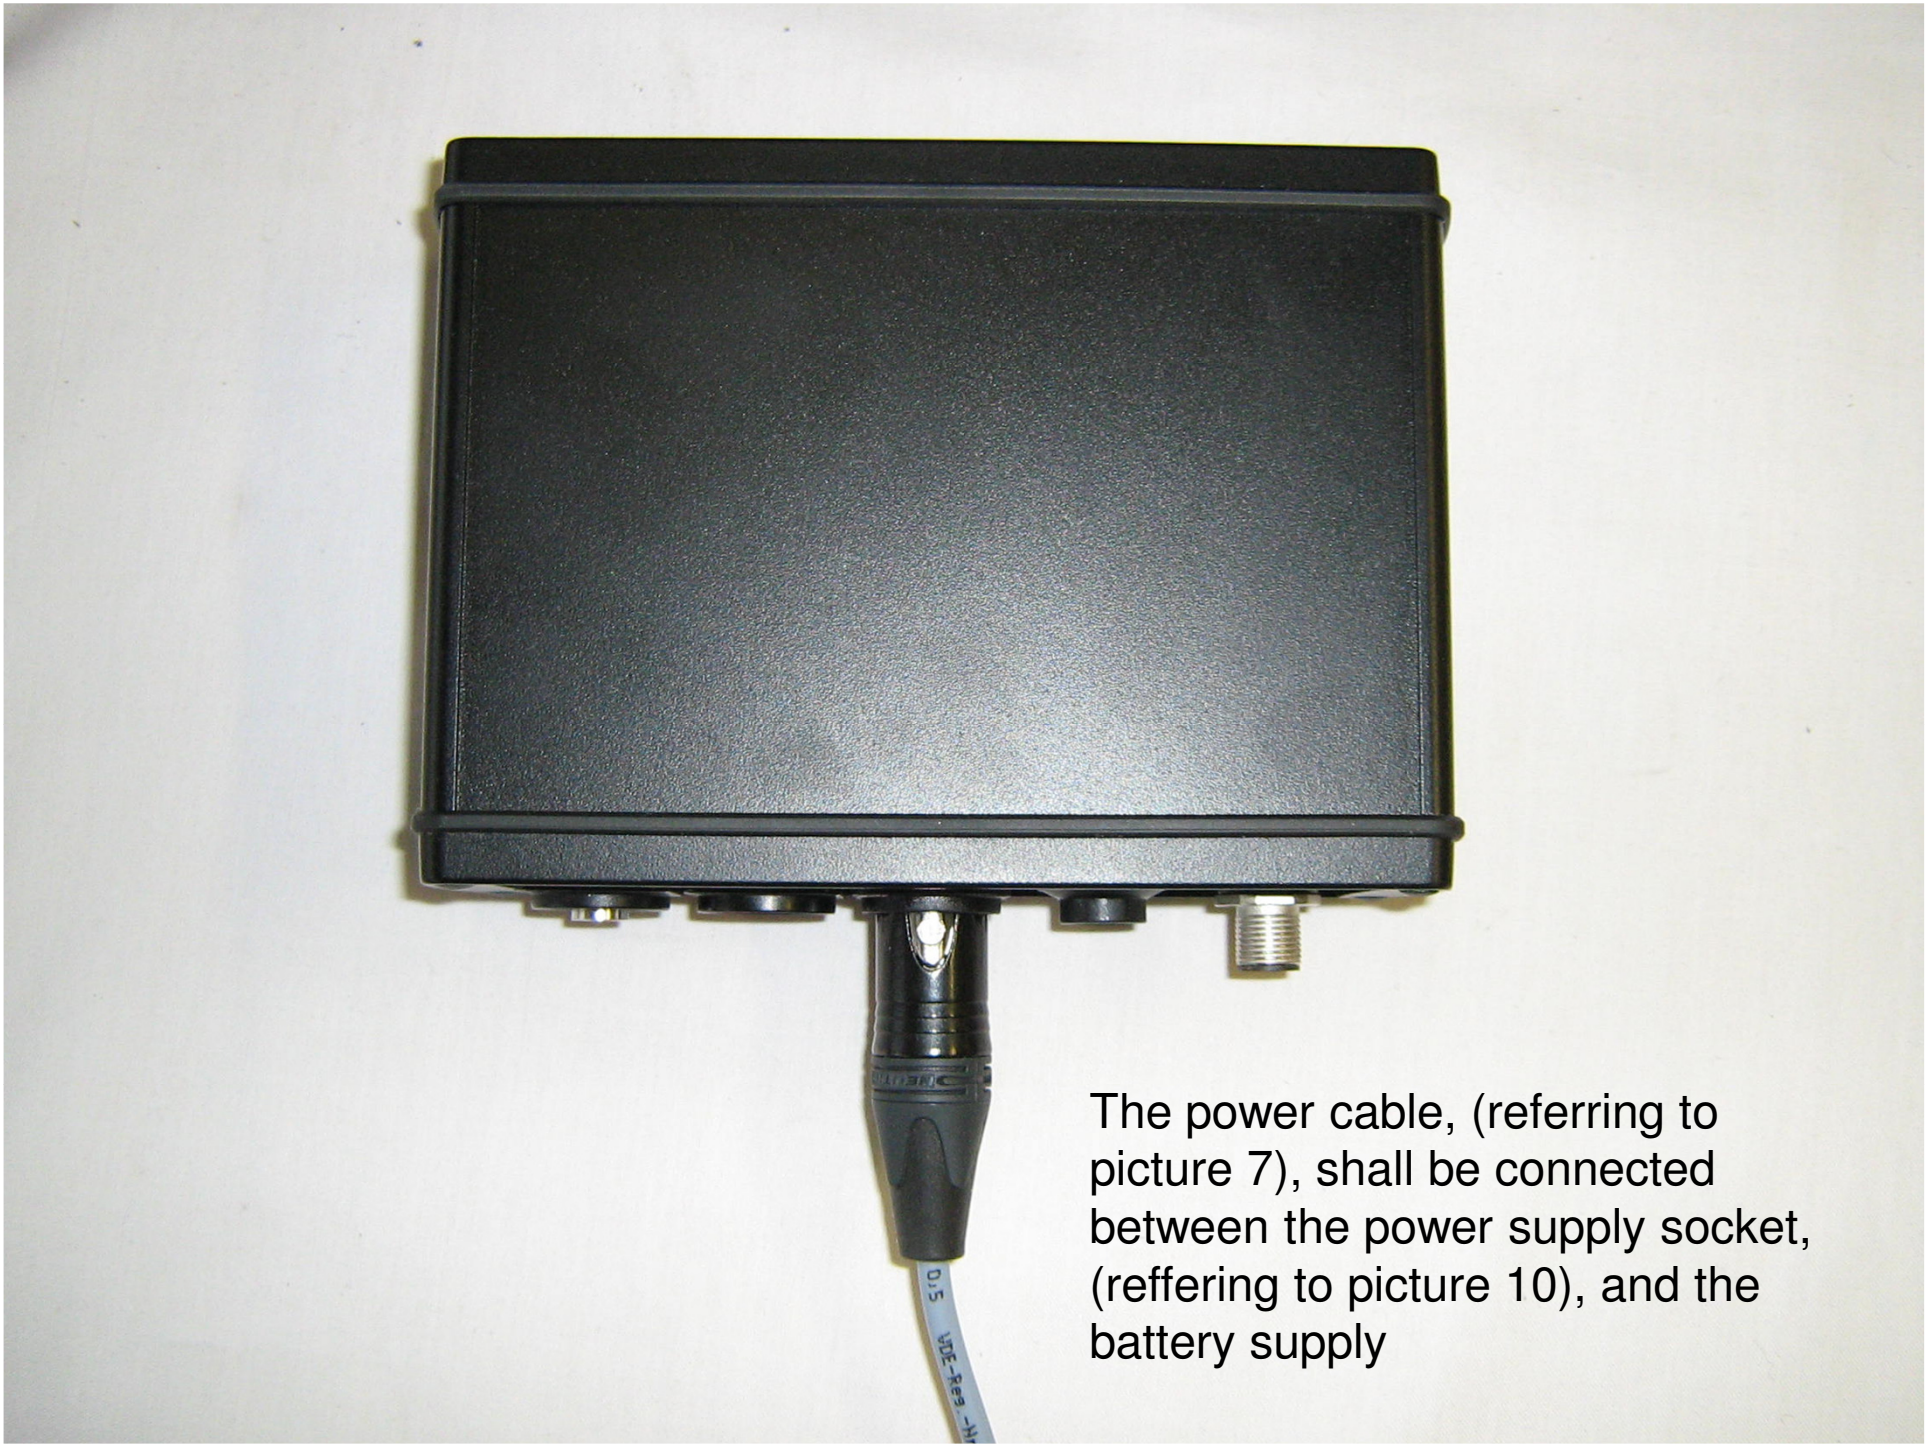

The power cable, (referring to picture 7), shall be connected between the power supply socket, (reffering to picture 10), and the battery supply

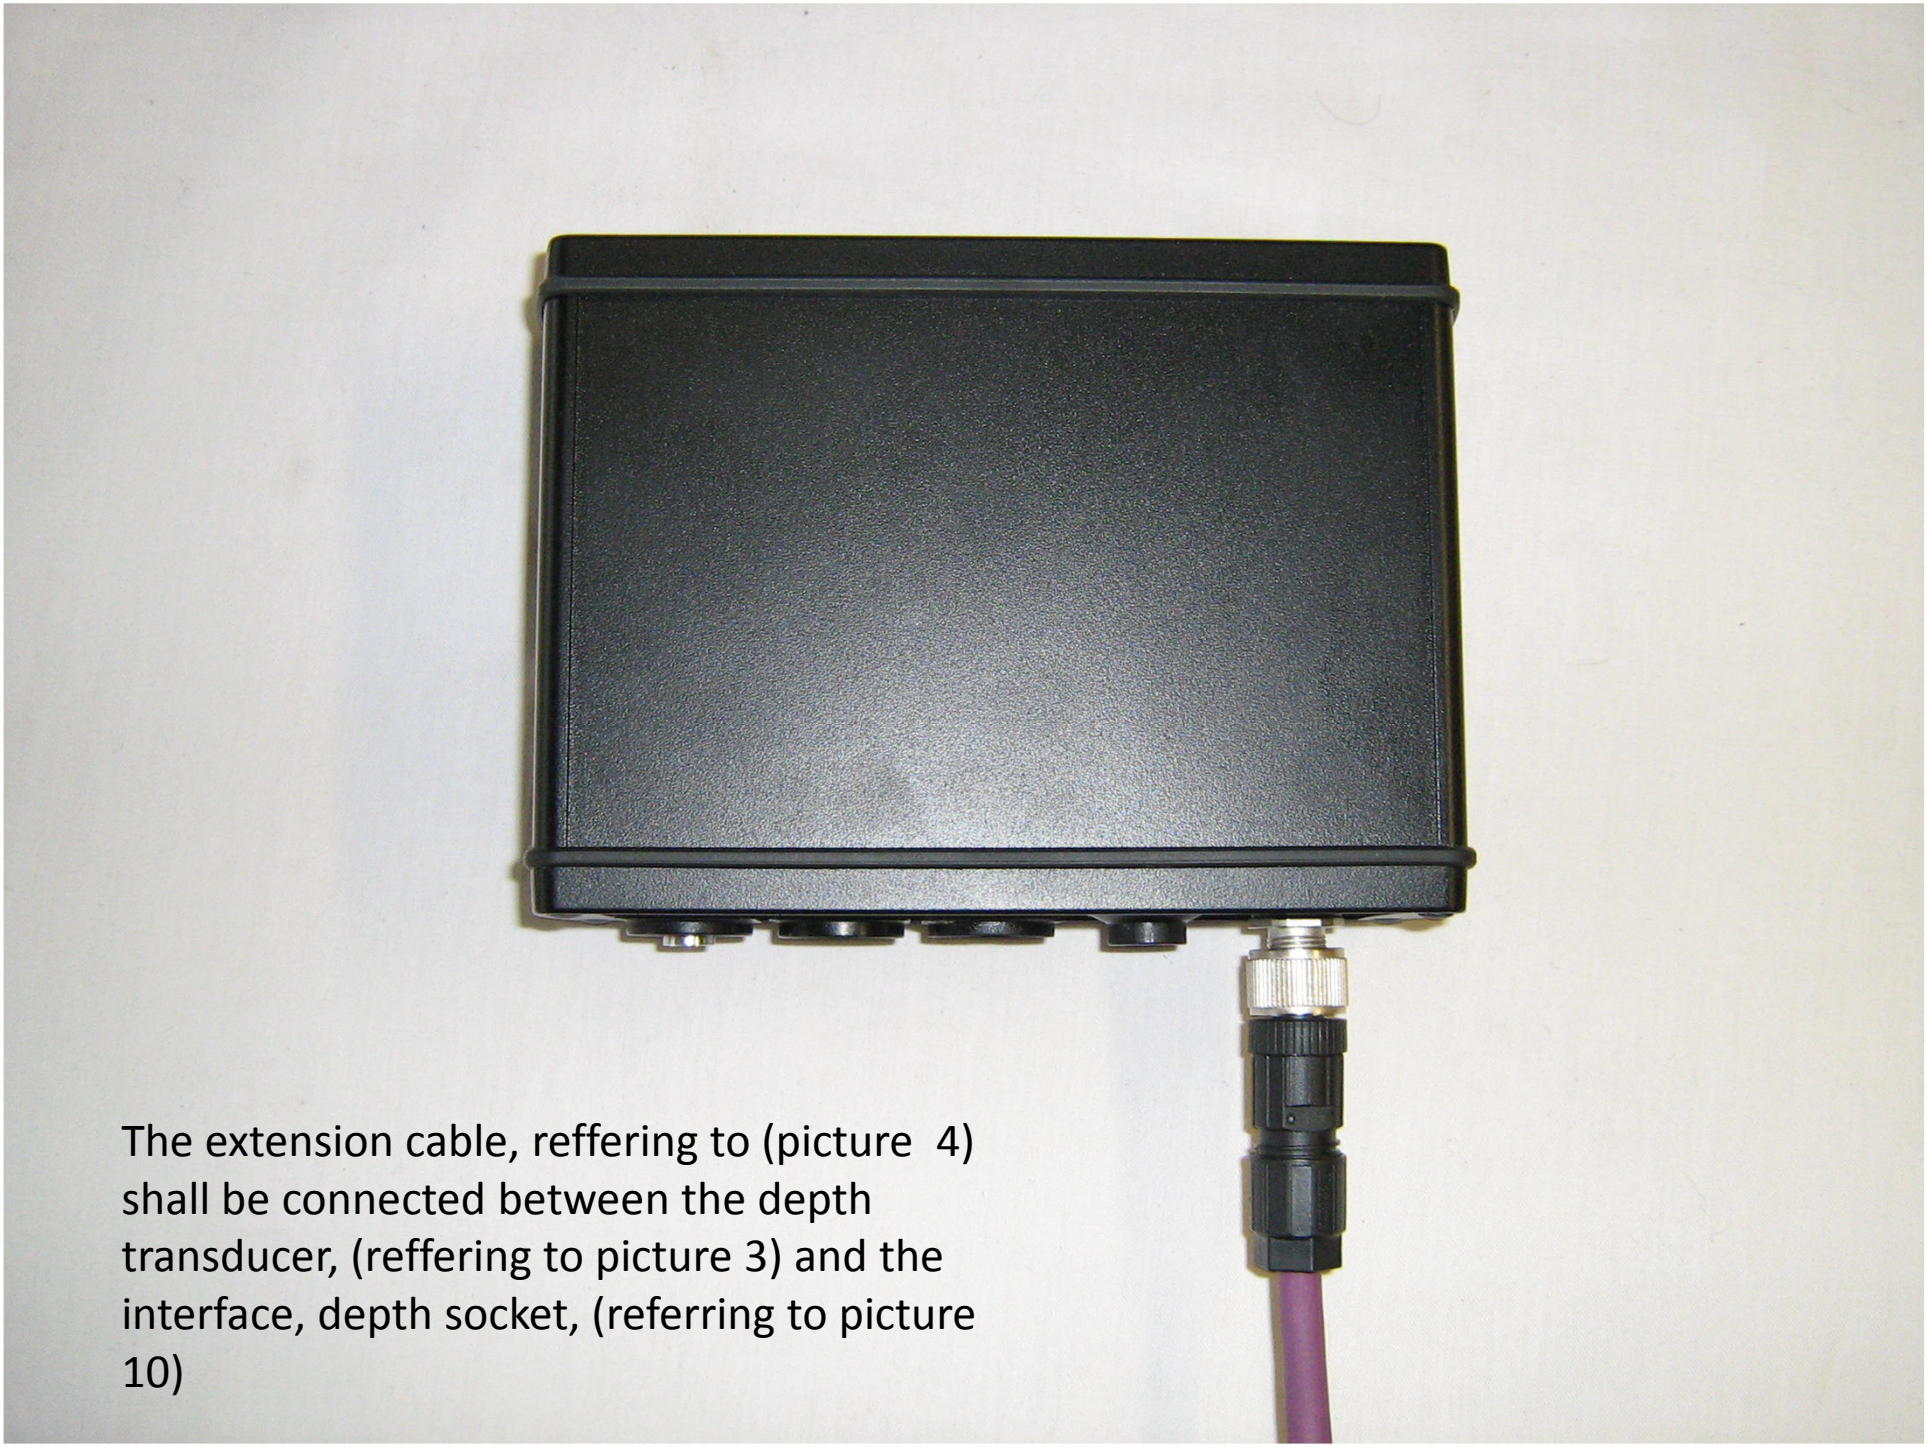

The extension cable, reffering to (picture 4) shall be connected between the depth transducer, (reffering to picture 3) and the interface, depth socket, (referring to picture 10)

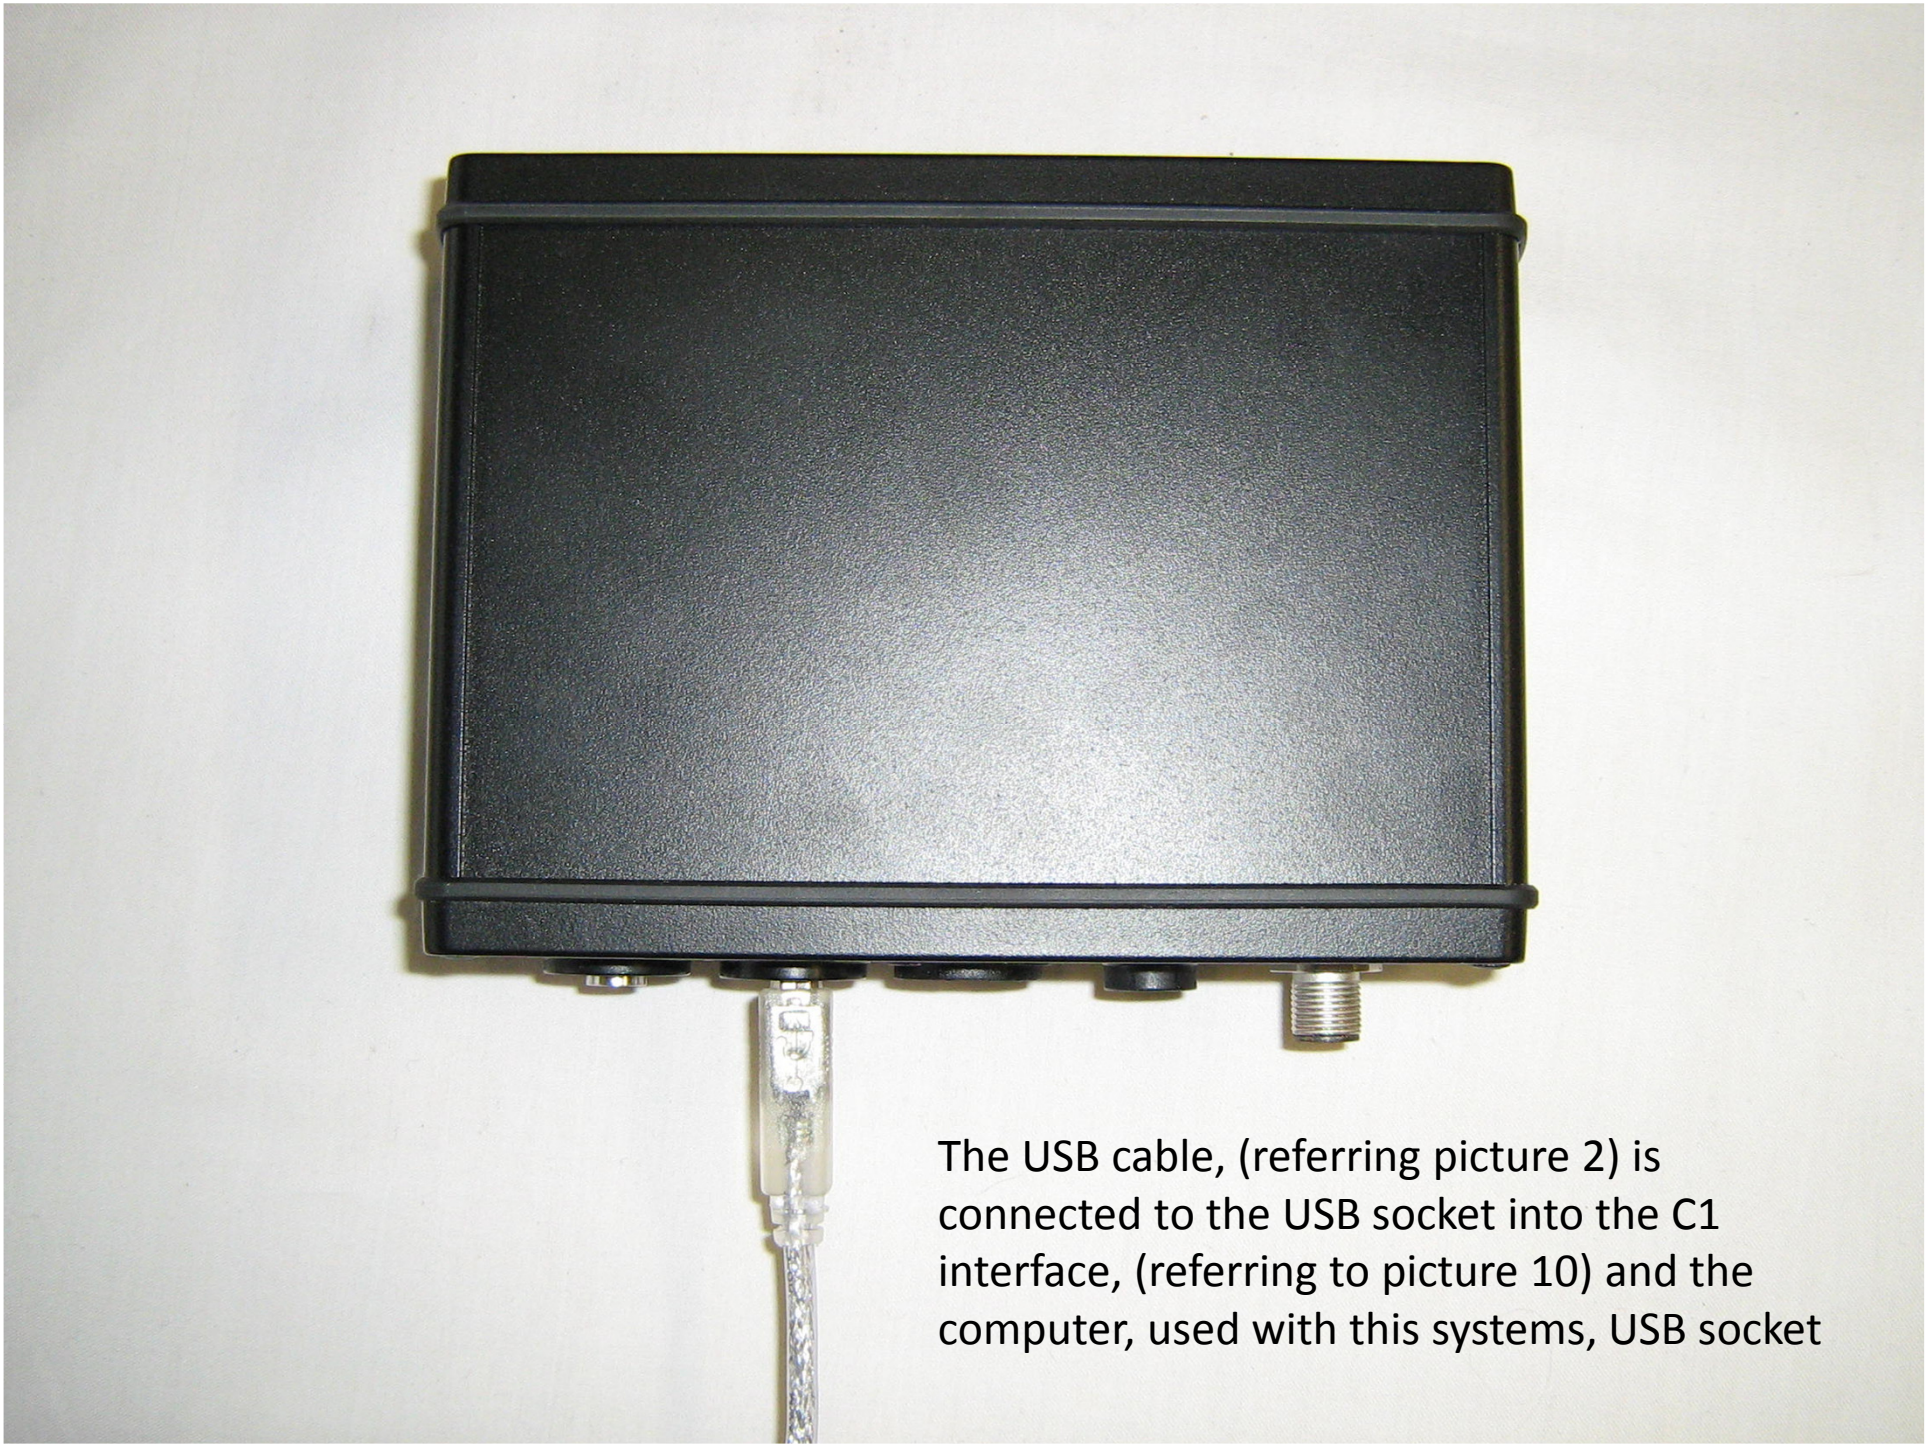

The USB cable, (referring picture 2) is connected to the USB socket into the C1 interface, (referring to picture 10) and the computer, used with this systems, USB socket